

Features

- Multi-Octave Tuning
- Low Phase Noise
- Excellent Linearity
- Flat Power Output vs Frequency
- Temperature Stable
- Phase Lock & Modulation Capability
- Analog & Digital Drivers Available

Applications

- Low Noise Synthesizers
- Sweep Oscillators
- Receiver Local Oscillators
- Jammer Exciters
- ATE Modules

Introduction

"YIG-Tuned Oscillator" is the generic name applied to solid-state oscillators whose tunable element is a sphere of Yttrium-Iron-Garnet (YIG). Gallium is often added to "dope" the sphere to extend the frequency range. These materials have extremely high unloaded Q's whose resonant frequency is varied (tuned) by an externally applied magnetic field. A single sphere, properly coupled to a microwave circuit, can be used over very broad frequency ranges, 0.5 to 26.5 GHz for example. The tuning range in oscillators realized with YIG tuning elements is limited mainly by the other circuit elements and the active devices.

Teledyne YIG-tuned oscillators are designed for very broad tuning range applications such as multi-octave sweep oscillators, receiver local oscillators, and electronic defense equipment.

These oscillators are offered in multiple package styles, from a 2" cylindrical, down to surface mount versions. They demonstrate tuning linearities typically better than 0.1% with output power flat over the tuning range to typically better than ± 2 dB. All Teledyne oscillators contain integral RF buffer amplifiers which insure both increased power output and isolation of the oscillator circuit from the load. Frequency pulling is typically less than 0.2 MHz with a 1.5:1 VSWR load at any phase. As an option, Teledyne can supply an integral driver (voltage-to-current converter) enabling tuning via a

Low Noise

The high unloaded Q of the tuning element insures the low phase noise essential in today's state-of-the-art systems. Teledyne employs a bipolar device in oscillators for low noise applications. These low noise devices produce oscillators with phase noise typically -125dBc/Hz at 10 KHz from the carrier. Units designed for operation above 10GHz use a GaAs FET device for very broad-band operation (4 to 18 GHz for example) with typical phase noise of -100dBc/Hz at a 100KHz offset. All Teledyne oscillators can be optionally equipped with an internal (FM) coil which can be used to modulate the signal or enable the oscillator to be phase locked to an ultra-stable reference for even lower phase noise close to the carrier. Deviations as high as 40MHz at a 400KHz rate are possible using the FM coil. Teledyne drivers for YIG-tuned oscillators are also designed with low noise applications in mind without sacrificing tuning speed. Driver contributed incidental FM is typically better than 50KHz peak to peak. Special low noise drivers to further decrease driver contributed noise are available.

MIL Environments

A hermetically sealed structure and specially temperature-compensated magnet make Teledyne YIG-tuned oscillators ideal for use in harsh MIL environments with temperature ranges of -55 to $+85^{\circ}\text{C}$. The use of microwave hybrid circuits, superior heat sinking, and special screening meeting the intent of MIL-STD-883 insures high MTBF. Drivers use all MIL parts and are designed to minimize aging which degrades tuning accuracy over time. This lowers maintenance and calibration requirements with the obvious benefits to lifecycle cost.

Teledyne Support

This brochure serves to provide examples of Teledyne YIG capability. Teledyne provides applications support to aid customers to formulate specifications for devices unique to their applications. Our engineers, equipped with computer-aided design tools, are available to become a part of your design team. Contact Teledyne or the Teledyne representative in your area.

Specification Definitions

Power Output

The RF fundamental power output into a 50 ohm load over the specified tuning range under all other specified conditions.

Power Output Variation

The variation or flatness of output power into a 50 ohm load over the specified tuning range under all specified environmental conditions.

Harmonics

The output level, with respect to the fundamental output (carrier), of signals which are integer multiples of the fundamental, under all specified environmental conditions.

Non-Harmonic Spurious

The level, with respect to the fundamental output (carrier), of signals not harmonically related to the fundamental, under all specified environmental conditions.

Tuning Linearity

The deviation from a straight line fitted to the curve of output frequency, measured into a 50 ohm load ($<1.2:1$ VSWR), vs. main tuning coil current as the oscillator is tuned upward from the low to high end of the specified tuning range. When expressed as a percentage, the worst case deviation is a percentage of the highest frequency in the specified tuning range.

Temperature Drift

The change in RF output frequency using constant coil currents (or constant tuning voltage or digital word in the case of oscillators with drivers) as the oscillator baseplate temperature is varied over the specified temperature range. Measurements are taken after the oscillator has stabilized at a selected temperature, and temperature induced hysteresis effects have been removed.

Hysteresis

The maximum difference in tuned frequency, measured at the same coil current (or same tuning voltage or digital word in the case of oscillators with drivers), when the oscillator is tuned slowly through the specified tuning range both upward (low end to high end) and downward (high end to low end).

Since hysteresis is caused by an unstable magnetization, it represents a tuning uncertainty as shown in Figure 1. For a given coil current, the tuned frequency will fall within the shadowed area depending on tuning step size, tuning speed, and environmental factors. The line A-B represents a stable magnetic condition. This can be best realized by step tuning each frequency from the low end of the tuning range.


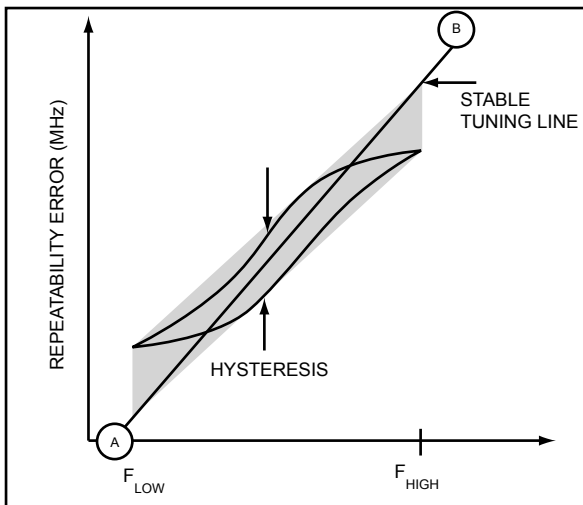


Figure 1 — Magnetic Relaxation Uncertainty — Maximum frequency repeatability error at any fixed coil current due to unknown hysteresis bias of the magnet as a result of tuning speed, magnitude of step and/or direction, vibration, and mechanical and/or thermal shock. Maximum error is equal to hysteresis.

Model Numbers

Several options are available which can be specified in the Model Number chosen:

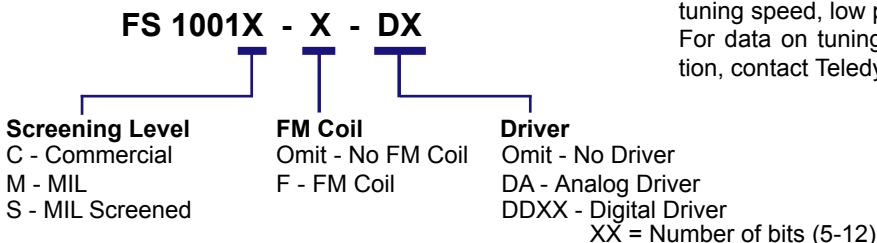

Frequency Pushing

The change in output frequency produced by an incremental change in the power supply voltage.

Frequency Pulling

The change in output frequency as the phase of the impedance of a specified load mismatch is varied over a 360 degree range.

Phase Noise

The level of phase/frequency instability of the oscillator. Characterized in the frequency domain, phase noise is measured with respect to the fundamental output level in a 1 Hz bandwidth at a specified offset from the fundamental output (carrier). This parameter does not include noise effects of power supplies or drivers.

Coil

The average slope of the tuning curve of output frequency vs. coil current. The approximate current needed by the main tuning coil or FM coil to achieve a specific frequency can be calculated by dividing the highest tuned frequency by the sensitivity.

Heater Current

As a means of preventing temperature drift of the YIG sphere, it is maintained at a constant temperature (near 80°C) by a small internal, self-regulating, heater element. This element requires a voltage of 28 ±4 volts. Since the heater is isolated from other circuits, the regulation requirements are not as stringent as for other supplies (bias and tuning). The current drawn by the heater element varies with temperature and is typically specified for a steady-state condition at 25°C. When initially powered on, there is a current surge which diminishes to near the steady-state value in a few seconds.

Tuning Speed

There are several factors affecting tuning speed, including tuning coil and magnet design, method of tuning, driver design, power supply voltage, etc. Tradeoffs may be required to achieve both adequate tuning speed, low phase noise, and low incidental FM. For data on tuning speed for your particular application, contact Teledyne directly.

Specifications 1.25", 1.4", 1.0" Cube and Low Profile Packages

	FS1021	FS1022	FS1023	FS1033	FS1034	FS1035	FS1042	FS1043	FS2692
Tuning Range (GHz)	2-10	2-8	2-6	5-18	6-18	8-18	2-8	2-6	6-13
Power Output (dBm)									
Minimum									
(0 to 60°C)	12	13	13	12	13	13	14	15	13
(-55 to +85°C)	10	11	11	10	11	11	13	13	11
Variation (dB, max)									
(0 to 60°C)	±2	±2	±2	±2.5	±2.5	±2.5	±2	±2	±3
(-55 to +85°C)	±3	±3	±2	±3	±3	±3	±3	±3	±3
Harmonics (dBc, max)	-12	-12	-12	-12	-12	-12	-12	-12	-12
Non-Harmonic Spurious (dBc, max)	-60	-60	-60	-60	-60	-60	-60	-60	-60
Temperature Drift (MHz, max)									
(0 to 60°C)	15	15	15	20	20	20	15	15	20
(-55 to +85°C)	20	20	20	30	30	30	20	20	30
Tuning Linearity (% , max)	±.15	±.10	±.08	±.10	±.085	±.05	±.10	±.08	±.25
Hysteresis (MHz, max)	10	8	6	15	12	10	8	6	10
Frequency Pushing (MHz/V, max)	1.5	1.5	1.5	0.2	0.2	0.2	1.5	1.5	1.5
Frequency Pulling (1.5:1 VSWR, max)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
TUNING COIL									
Sensitivity (MHz/mA) ±10%	20	20	20	20	20	20	20	20	20
Resistance (ohms, max)	6	6	6	6	6	6	6	6	10
Inductance (mH, max)	75	75	75	75	75	75	22	22	30
OPTIONAL FM COIL									
Sensitivity (KHz/mA, typ)	400	400	400	400	400	400	400	400	310
3 dB Bandwidth (KHz, typ)	400	400	400	400	400	400	400	400	2000
Resistance (ohms, typ)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Inductance (µH, typ)	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	2.0
BIAS CURRENT									
@ +15 Volts (mA, max)	200	200	200	250	250	250	200	200	175
@ -5 Volts (mA, max)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	30
HEATER CURRENT									
@ 28 ±4 Volts (mA, max)									
@ 25°C Steady State	40	40	40	40	40	40	40	40	50
Surge at Turn-On (mA, max)	500	500	500	500	500	500	600	600	300
OUTLINE									
	OUTLINE 1, 3 OR 4			OUTLINE 1 OR 4			OUTLINE 3 OR 5		
Weight (max)	11 oz/312 grams						3.5 oz/98 grams		

Specifications 1.25" Cube & 2" Cylindrical Package

	FS2707	FS2637	FS2678	FS1014	FS1012	FS1013
Tuning Range (GHz)	2—10	8—18	12—20	4—18	6—18	8—18
Power Output (dBm)						
Minimum						
(0 to 60°C)	12	13	10	13	16	16
(-55 to +85°C)	11	11	10	10	13	13
Variation (dB, max)						
(0 to 60°C)	±2	±2.5	±2.5	±2.5	±2.5	±2.5
(-55 to +85°C)	±3	±3.5	±3.5	±3.5	±3	±3
Harmonics (dBc, max)	-12	-12	-12	-12	-12	-12
Non-Harmonic Spurious (dBc, max)	-60	-60	-60	-60	-60	-60
Temperature Drift (MHz, max)						
(0 to 60°C)	15	15	30	20	20	20
(-55 to +85°C)	20	20	40	30	30	30
Tuning Linearity (% , max)	±.15	±.10	±.15	±.075	±.075	±.075
Hysteresis (MHz, max)	8	12	12	15	12	10
Frequency Pushing (MHz/V, max)	1.5	0.5	0.5	0.2	0.2	0.2
Frequency Pulling (1.5:1 VSWR, max)	0.2	0.5	0.5	0.2	0.2	0.2
TUNING COIL						
Sensitivity (MHz/mA) ±10%	20	20	20	20	20	20
Resistance (ohms, max)	6	6	6	6	6	6
Inductance (mH, max)	90	90	90	90	90	90
OPTIONAL FM COIL						
Sensitivity (KHz/mA, typ)	400	400	400	400	400	400
3 dB Bandwidth (KHz, typ)	400	2000	2000	400	400	400
Resistance (ohms, typ)	1.0	1.0	1.0	1.0	1.0	1.0
Inductance (µH, typ)	1.0	1.5	1.5	1.0	1.0	1.0
BIAS CURRENT						
@ +15 Volts (mA, max)	150	180	180	250	250	250
@ -5 Volts (mA, max)	N/A	30	30	N/A	N/A	N/A
HEATER CURRENT						
@ 28 ±4 Volts (mA, max)						
@ 25°C Steady State	50	70	70	40	40	40
Surge at Turn-On (mA, max)	500	500	500	500	500	500
OUTLINE	OUTLINE 1			OUTLINE 2		
Weight (max)	20 oz/570 grams					

Oscillators With Drivers

The addition of a stable voltage-to-current converter, or driver, allows the system designer to achieve linear tuning via an analog voltage ramp or digital tuning word. All components in Teledyne drivers are chosen for maximum stability in both short- and long-term operation. The driver is matched to the oscillator by computer selection of trim resistors. This procedure avoids the use of large potentiometer ranges which increase aging errors.

Most YIG oscillator applications require fast tuning speeds while at the same time they must produce clean, stable output frequency when held at a single frequency (CW). This represents a conflict in requirements for the bandwidth of the driver circuit. Large band-width would insure fast tuning response, while narrower bandwidth would reduce the effects of power supply ripple, ripple on the tuning voltage, and driver added noise which cause incidental FM. Teledyne oscillator drivers were designed after a careful analysis of the contributed noise factors of each component. The resulting design offers the lowest incidental FM compatible with fast tuning speed.

Teledyne MIL drivers contain all MIL-specified parts (see Screening Level Definitions) and are temperature compensated for operation over the -55 to +85°C range. The resulting static frequency drift with temperature of the oscillator/ driver combination is minimized. Conformal coating of the printed circuit boards and a moisture-sealed housing insure survival in the MIL-E-5400 Class 2 airborne environment.

Driver Typical Specifications

The following specifications apply to the driver only. See oscillator specifications for RF and coil current specifications.

Tuning Input	Analog 0 to 10 Volts. Digital (TTL) 5 to 12 bits.
Tuning Impedance	>10 K ohms for analog tuning. One TTL load for digital tuning.
Power Supply	(in addition to oscillator coil and bias requirements): ±15 Volts(1) @ 30 ma for analog tuning. +5 Volts @ 50 ma for digital tuning. @ 30 ma for digital tuning.

(1) The current for the oscillator main tuning coil is drawn from the +15 Volt supply in Teledyne standard drivers.

Screening Levels

The following defines the component quality, inspection, and screening levels available with Teledyne oscillators or oscillators with drivers.

Commercial ("C")

1. Internal Visual Inspection.
2. 24-Hour Stabilization Bake at 125°C.
3. Laser Weld.
4. 100% Electrical Test at 25°C:
Tuning Range Harmonics Power Variation
Linearity Hysteresis Bias Current
Power Output
5. External Visual Inspection.

Commercial drivers use best commercial quality components which are identical in function to those used in "M" and "S" level units.

Military ("M")

1. Internal Visual per MIL-STD-883C, Method 2017.3.
2. 24-Hour Stabilization Bake at 125°C per MIL-STD-883C, Method 1008.2, Condition B.
3. Laser Weld Seal in inert nitrogen gas environment.
4. Fine Leak Test per MIL-STD-883C, Method 1014.5, Condition A1 or A2.
5. Gross Leak Test per MIL-STD-883C, Method 1014.5, Condition C1 or C2.
6. Burn-in, 96 Hours at 85°C per MIL-STD-883C, Method 1015.4, Condition B.
7. 100% Electrical Test:
Tuning Range Power Variation Harmonics
Linearity Temperature Drift Hysteresis
Power Output Bias Current
8. External Visual per MIL-STD-883C, Method 2009.4.

Military drivers use components selected as follows:

Resistors and Capacitors:	Established Reliability (ER).
Transistors and Diodes:	JANTX
Integrated Circuits:	Screened to MIL-STD-883, Level B.


Printed wiring boards are conformally coated with a material in conformance with MIL-C-46058. The integrated oscillator and driver is subjected to screening steps 6, 7, and 8.

Military, Screened ("S")


1. Internal Visual per MIL-STD-883C, Method 2017.3.
 2. 24-Hour Stabilization Bake at 125°C per MIL-STD-883C, Method 1008.2, Condition B.
 3. Laser Weld Seal in inert nitrogen gas environment.
 4. Fine Leak Test per MIL-STD-883C, Method 1014.5, Condition A1 or A2.
 5. Gross Leak Test per MIL-STD-883C, Method 1014.5, Condition C1 or C2.
 6. Temperature Cycle, -55°C to +125°C, 10 cycles per MIL-STD-883C, Method 1010.5, Condition B.
 7. Mechanical Shock, 500g's at 1 msec, Y1 axis, per MIL-STD-883C, Method 2002.3, Condition A, or Constant Acceleration, 5000g's, per MIL-STD-883C, Method 2001.2, Condition A.
 8. Burn-in, 96 Hours at 85°C per MIL-STD-883C, Method 1015.4, Condition B.
 9. Fine Leak Test per MIL-STD-883C, Method 1014.5, Condition A1 or A2.
 10. Gross Leak Test per MIL-STD-883C, Method 1014.5, Condition C1 or C2.
 11. 100% Electrical Test:
Tuning Range Power Variation Linearity
Harmonics Temperature Drift Hysteresis
Power Output Bias Current
 12. External Visual per MIL-STD-883C, Method 2009.4.
- Military, screened drivers are similar to "M" level described except that MIL-M-38510 integrated circuits are used if available. The integrated oscillator and driver is subjected to screening steps 6, 8, 11, and 12.

Outline Drawings


OUTLINE 1. (1304893)

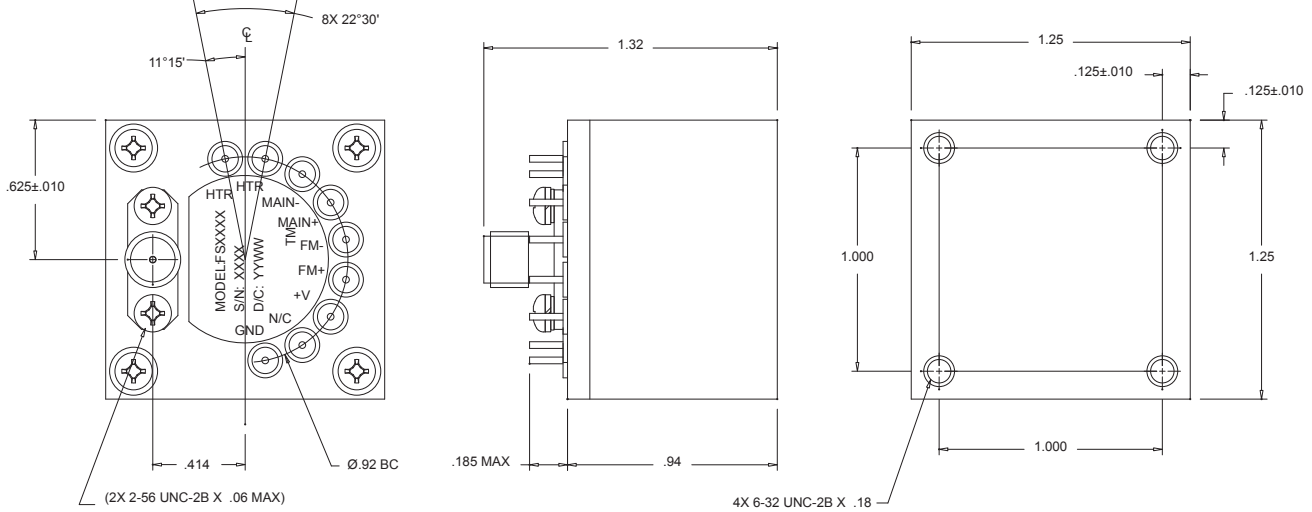

OUTLINE 2. (2000048)

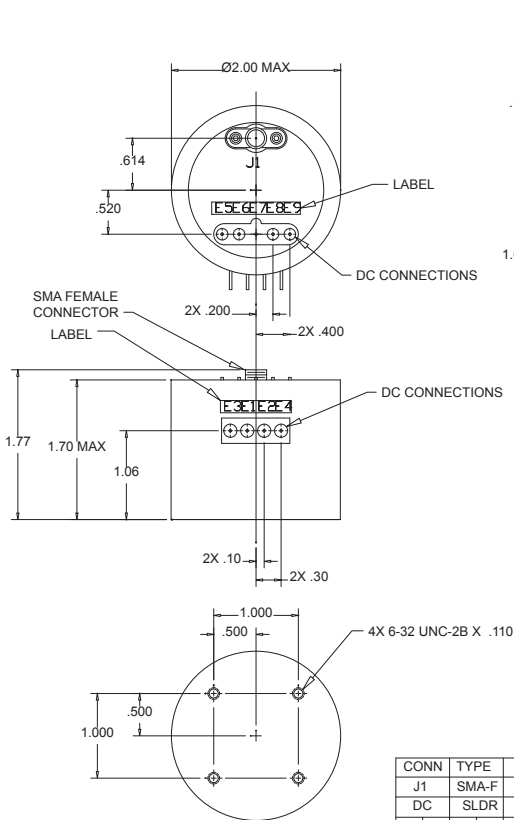


OUTLINE 3. (1303584)

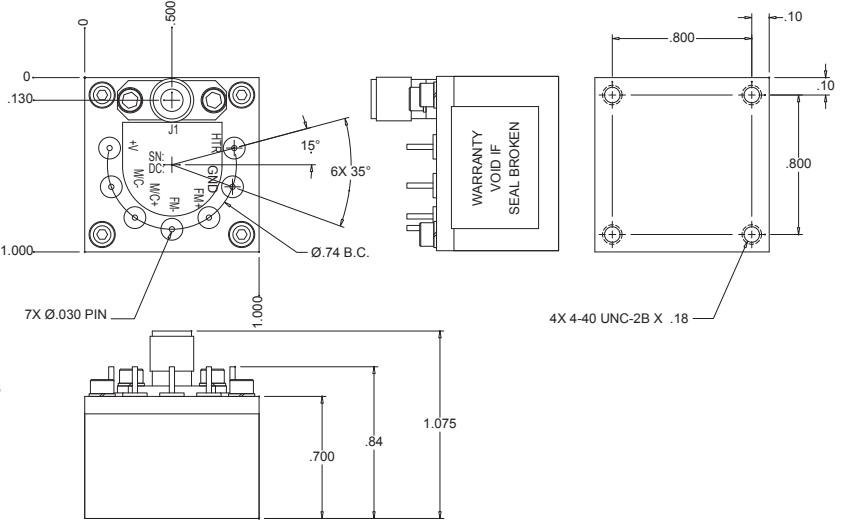

CONN	TYPE	PIN NO.	FUNCTION
J1	SMA-F	THD	RF OUT
DC	SLDR	E1	MAIN COIL (+)
		E2	MAIN COIL (-)
		E3	FM COIL (+)
		E4	FM COIL (-)
		E5	N/C
		E6	+15 OSC BIAS VOLT
		E7	GROUND
		E8	HEATER VOLT Δ
		E9	HEATER VOLT Δ

Outline Drawings


OUTLINE 4. (0200106)

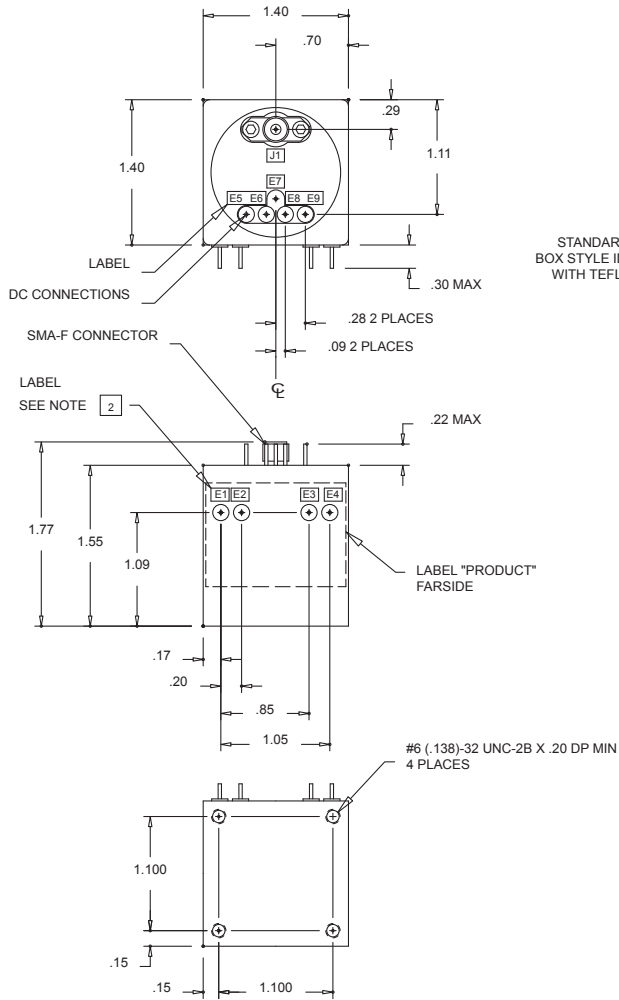

CONN.	TYPE	PIN NO.	FUNCTION
J1	SMA-F	THD	RF OUT
DC	SLDR	E1	MAIN COIL (+)
		E2	FM COIL (+)
		E3	FM COIL (-)
		E4	MAIN COIL (-)
		E5	N/C
		E6	+15 OSC BIAS VOLT
		E7	GROUND
		E8	HEATER VOLT 1
DC	SLDR	E9	HEATER VOLT 1

TOLERANCE	
.XX	±.02 [.51]
.XXX	±.005 [.127]

OUTLINE 5. (1305318)

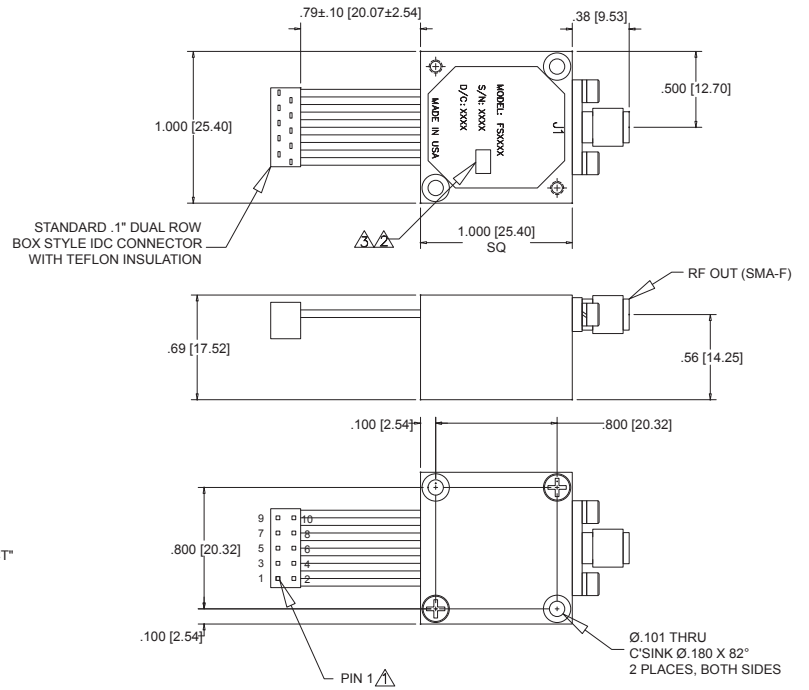

PIN NO.	TYPE	FUNCTION
J1	SMA-F	RF OUTPUT
1	CONN	MAIN COIL +
2		MAIN COIL -
3		GND
4		FM COIL +
5		FM COIL -
6		GND / -5V (AS REQUIRED)
7		+V
8		GND
9		HEATER RTN
10	CONN	HEATER

Ordering Information

Price and delivery quotations for the devices specified in this brochure can be obtained from Teledyne representatives or directly from the factory. Teledyne terms are net 30 days, F.O.B. Mountain View, California. Specifications are subject to change without notice. Teledyne products carry a 12 month warranty. Contact Teledyne for terms and conditions.

Other Teledyne YIG Products

Electronically Tuned Subsystems

Teledyne Microwave can integrate the oscillators and drivers described in this data sheet with our Ferretrac® closed-loop YIG filters, mixers, couplers, and amplifiers to provide complete receiver front-ends. The complete solution.

Ferretrac® Closed-Loop YIG Filters (0.5–40 GHz)

These devices lock to a sample of an externally supplied RF reference frequency, such as the local oscillator in a receiver, and correct for all tuning errors such as temperature drift, non-linearity, hysteresis, and driver aging. Ideal as receiver preselectors, and in test equipment to filter out spurious signals while insuring repeatability, Ferretrac filters are always on frequency.

Wide Bandwidth YIG Filters (0.5–40 GHz)

Teledyne Microwave is a leader in providing very wide band-width YIG filters for state-of-the-art EW receivers. Bandwidths as wide as 500 MHz are available from 6 to 18 GHz and up to 50 MHz from 2 to 18 GHz. These devices, like all Teledyne Microwave filters, can also be supplied with analog or digital drivers.



Band-Reject YIG Filters (0.5–26 GHz)

Tunable notches have applications in systems which could be damaged or blocked by high-level friendly or hostile emitters. Teledyne can provide 40 dB minimum notch depth and tuning ranges of 3:1 in the 0.5 to 26 GHz range.

High-Power YIG-Tuned Harmonic Generators

Teledyne manufactures a line of high output power YIG-tuned harmonic generators which eliminate the need for external amplifiers by providing a minimum -5 dBm signal output over the 2 to 18 GHz band. Excellent matching techniques between the step recovery diode and the YIG filter result in consistent power output levels across the band. The internal driver allows tuning via a 0 to 10 Vdc analog voltage. Options include extended frequency coverage to 26 GHz, alternate input frequency references of 100, 200, or 500 MHz, digital 12-bit tuning, and increased adjacent harmonic rejection via Teledyne 7-stage filters.

